

PAPER

Multiple-Cell-Upset Tolerant 6T SRAM Using NMOS-Centered Cell Layout*

Shusuke YOSHIMOTO^{†a)}, Shunsuke OKUMURA[†], *Student Members*, Koji NII^{††}, Hiroshi KAWAGUCHI[†], and Masahiko YOSHIMOTO^{†††}, *Members*


SUMMARY This paper presents a proposed NMOS-centered 6T SRAM cell layout that reduces a neutron-induced multiple-cell-upset (MCU) SER on a same wordline. We implemented a 1-Mb SRAM macro in a 65-nm CMOS process and irradiated neutrons as a neutron-accelerated test to evaluate the MCU SER. The proposed 6T SRAM macro improves the horizontal MCU SER by 67–98% compared with a general macro that has PMOS-centered 6T SRAM cells.

key words: SRAM, soft error rate (SER), multiple cell upset (MCU), neutron particle, twin well, triple well

1. Introduction

Nano-scaled integrated circuits are susceptible to particle-induced single event effect (SEE) because of their low signal charge and noise margin [1]–[3]. Particularly multiple cell upsets (MCUs), which are defined as simultaneous errors in more than one memory cell induced by a single event, have been closely investigated. The MCUs are caused by a collection of charges produced by secondary ions in neutron-induced nuclear reaction. The ratio of the MCUs to single-event upsets (SEUs) is predicted to increase drastically in nano-scaled SRAMs [4]–[6]. Process-scaling causes multiple MCU modes: charge sharing among memory storage nodes, bipolar effect in a P-well, and multi-coupled bipolar interaction (MCBI) [7]. In the literature, fail bits are spread over about a 1000×1000 bit area in 22-nm SRAM design; it is apparently impossible to correct multiple bit upsets (MBUs = MCUs in the same word) merely by error correction coding (ECC) [8].

Respective Figs. 1(a) and 1(b) show a schematic and a layout of a general 6T SRAM cell with a 65-nm CMOS logic rule. In the design, the sizes of the transistors are relaxed to suppress threshold voltage variation so that the cell area is about twice as large as a commercial 65-nm 6T cell [9]. The 6T cell consists of PMOS load transistors (PL0, PL1), NMOS driver transistors (ND0, ND1) and access transistors (NA0, NA1). A wordline (WL) and two bitlines (BL, BLN) are horizontally and vertically connected among cells, respectively. In the layout of the general 6T cell, the PMOS transistors are centered in the memory cell; this structure is called an NMOS-PMOS-NMOS (NPN) layout in this paper.

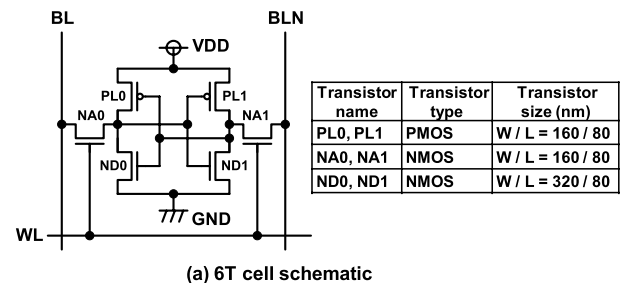

(a) 6T cell schematic

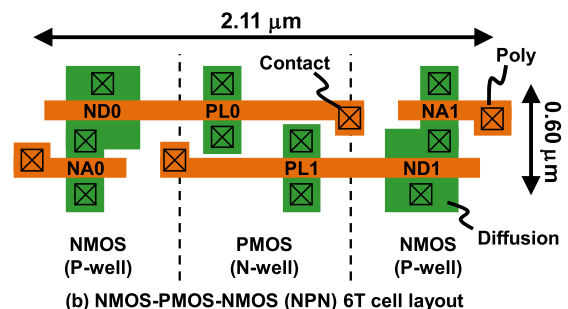


Fig. 1 (a) Schematic and (b) NMOS-PMOS-NMOS (NPN) layout of a general 6T SRAM cell.

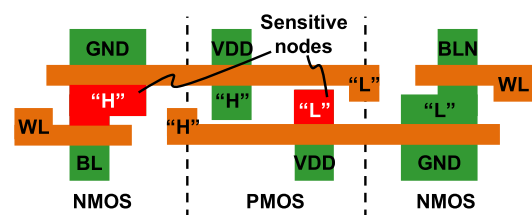


Fig. 2 Sensitive nodes in a general NPN 6T SRAM cell.

BLN) are horizontally and vertically connected among cells, respectively. In the layout of the general 6T cell, the PMOS transistors are centered in the memory cell; this structure is called an NMOS-PMOS-NMOS (NPN) layout in this paper.

Figure 2 shows sensitive nodes in the general 6T cell layout: a low-state (“L”) PMOS diffusion and a high-state (“H”) NMOS diffusion. We have observed that the NMOS has a four-times larger SEU cross section than a PMOS for a wide range of supply voltages (see Fig. 3) [10], [11]. The simulation results come from an iRoC TFIT soft-error simulator using database of a generic 65-nm bulk CMOS process [11]. Figure 4 shows an SRAM cell array using the general NPN 6T layout. In the conventional 6T SRAM, the sen-

Manuscript received October 25, 2012.

Manuscript revised March 15, 2013.

[†]The authors are with Kobe University, Kobe-shi, 657-8501 Japan.

^{††}The author is with Renesas Electronics Corporation, Kodaira-shi, 187-8588 Japan.

^{†††}The author is with JST CREST, Kobe-shi, 657-8501 Japan.

*This paper is the modified version of the original paper presented at the IRPS 2012 [18].

a) E-mail: yoshihy@cs28.cs.kobe-u.ac.jp

DOI: 10.1587/transfun.E96.A.1579

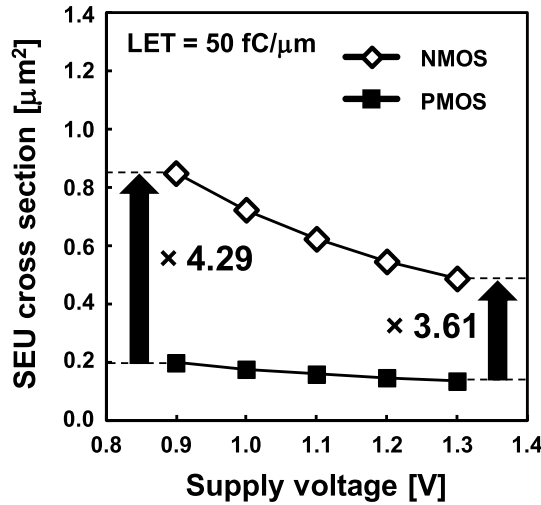


Fig. 3 SEU cross sections of NMOS and PMOS with a twin-well 65-nm process calculated using the iRoC TFIT simulator [10], [11].

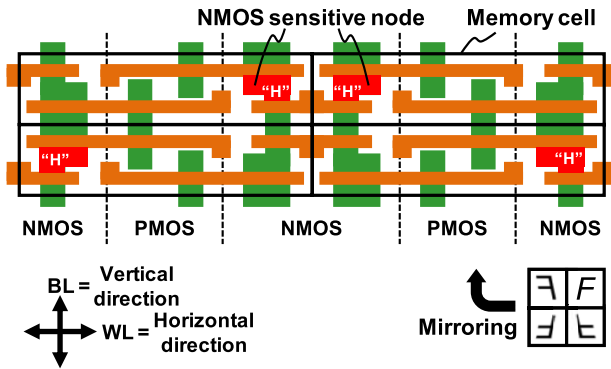


Fig. 4 SRAM cell array using the general NPN 6T cell layout.

sitive NMOS nodes are in a same P-well in the horizontal direction; horizontal upsets can be easily incurred.

In this paper, we present horizontal MCU improvement of a PMOS-NMOS-PMOS (PNP) 6T layout with 65-nm SRAM test chips. The SRAMs are designed in both of twin-well and triple-well structures because well engineering drastically affects the MCU SER [12], [13]. We will show experimental results at the Research Center for Nuclear Physics (RCNP), Osaka University; the proposed layout improves the horizontal MCU SER by 67–98% in the both of the twin- and triple-well structures. The proposed layout enhances effectiveness of single error correcting—double error detecting ECC (SEC-DED ECC).

2. Proposed NMOS-Centered 6T SRAM Cell and Macro Design

2.1 NMOS-Centered 6T SRAM Cell Layout

The proposed 6T cell is designed as a PMOS-NMOS-PMOS (PNP) layout in Fig. 5. The NMOS-centered 6T layout has the same transistors as the general one. The WL and the BLs are respectively assigned in horizontal and vertical direction.

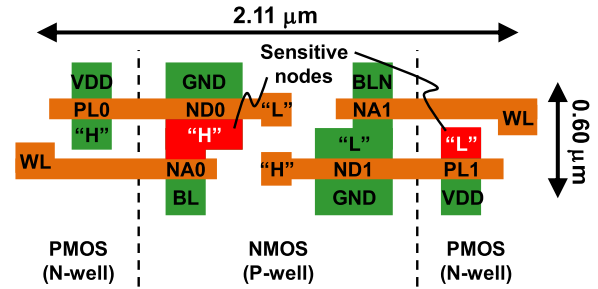


Fig. 5 Layout of a proposed PMOS-NMOS-PMOS (PNP) 6T cell.

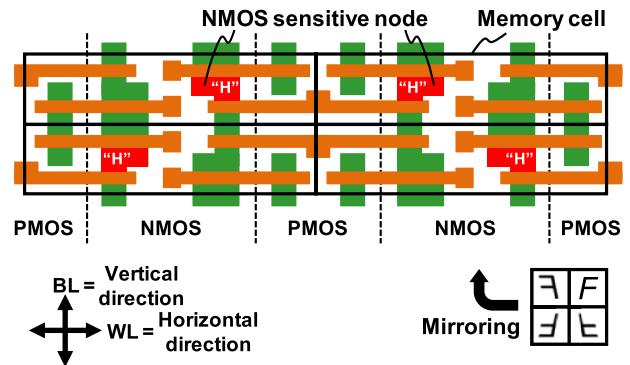


Fig. 6 SRAM cell arrays using the proposed PNP 6T cell layout.

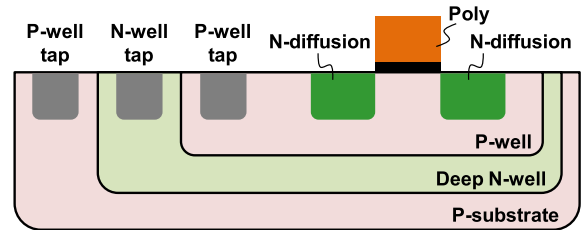


Fig. 7 Cross section of NMOS when using triple well.

The PNP 6T cell can lower a horizontal MCU rate because the NMOS-centered layout can separate the horizontally adjacent NMOS sensitive nodes with the N-well as shown in Fig. 6. The proposed layout has the same schematics and the cell area on the 65-nm logic rule basis, so that the proposed design can be implemented only by replacing its cell layout. Note that shared contacts, which are commonly used in an industrial SRAM rule, cannot be applied to the proposed 6T cell layout. This drawback incurs a certain area overhead in the SRAM rule basis design.

2.2 SRAM Macro Design

We designed and fabricated an 1-Mb SRAM test chip consisting of 256-Kb macros of four types (NPN layout with twin well, PNP layout with twin well, NPN layout with triple well (Fig. 7), and PNP layout with triple well), as presented in Fig. 8(a). Additionally, Fig. 8(b) illustrates the block diagram of a 16-Kb block (128 columns $\times$ 128 rows: 16 bits/word $\times$ 1 K words). The 16 bits in a same word are

aligned in a bit-interleaving manner. The SRAM macros using the four-type 6T cells occupy same areas so that the SRAM macros share same peripheral circuits. In the two macros with the triple-well structures, the memory cells are merely fabricated in the triple well; the peripheral circuits are on the twin well. In the memory cells on the triple-well structure, the deep N-well narrows the depth of the P-well; thereby the parasitic bipolar effect increases the MCU SER. This paper also investigates the dependency on the well structuring.

Figure 9 presents a layout of the implemented SRAM cell arrays and well taps. The NPN and PNP 6T cells de-

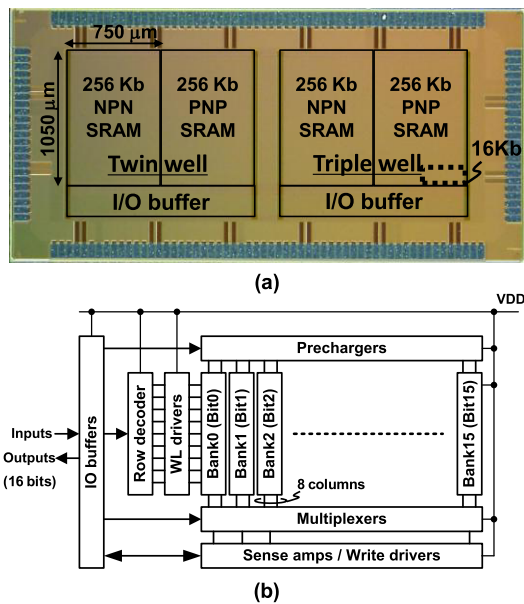


Fig. 8 (a) Micrograph of a 1-Mb SRAM test chip including NPN and PNP SRAMs with twin and triple wells. (b) Block diagram of a 16-Kb block.

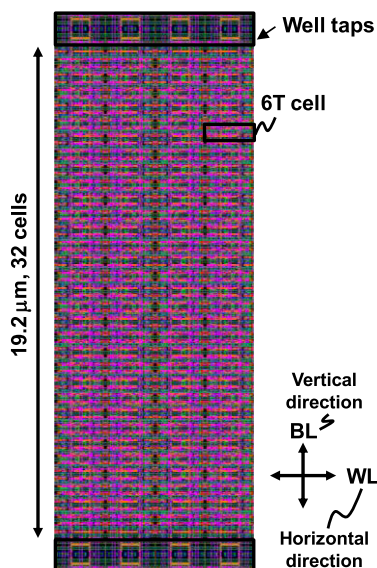


Fig. 9 Layout of memory cell array and well taps.

signed by the 65-nm logic rule have $2.11 \times 0.60 \mu\text{m}^2$ area (see Figs. 1(b) and 5; the gate length is relaxed to 80 nm to suppress variation). The well taps are inserted every 32 cells ($= 19.2 \mu\text{m}$) in the vertical direction; hence, a tap density is 1/32 of memory cells. Since the memory cell assigns the Metal-1 layer as internal connections, the vertical Metal-2 and horizontal Metal-3 layers are assigned as BLs and WLs.

3. Experimental Results

Figure 10 presents an experimental setup for a neutron-accelerated test. The neutron irradiation experiment is conducted at The Research Center for Nuclear Physics (RCNP), Osaka University. Spallation neutron beam generated by the 400-MeV proton beam irradiates a board under test (BUT) 7892-mm far from a tungsten target, on which three sample chips are placed in a BUT, for 30 hrs. The neutron flux is normalized to 13 cph/cm² above 10 MeV at ground level in New York City [14], which incorporates scattering effect [15], attenuation effect [16], and board screening effect [17]. Figure 11 shows a timeline on the BUT. The FPGA automatically generates input data pattern to the SRAM macro before the irradiation and finally outputs addresses of the fail bits. The FPGA is placed apart from an irradiation area (10 cm diameter) so that the FPGA properly works even in this irradiation test.

Figures 12(a) and 12(b) illustrate measurement results of single-bit-upset (SBU) SERs when a checkerboard (CKB) pattern and all-zero (ALL0) pattern are used. The supply voltage is applied to the four macros from 0.6 V to

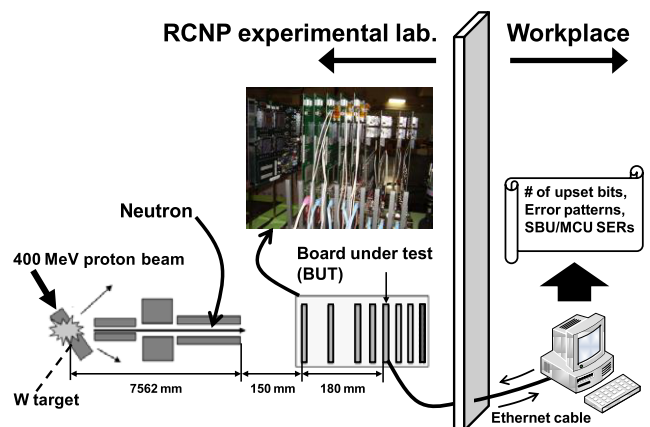


Fig. 10 Setup for neutron-accelerated test.

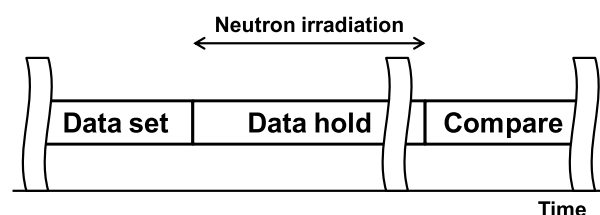


Fig. 11 Timeline in the neutron-accelerated test.

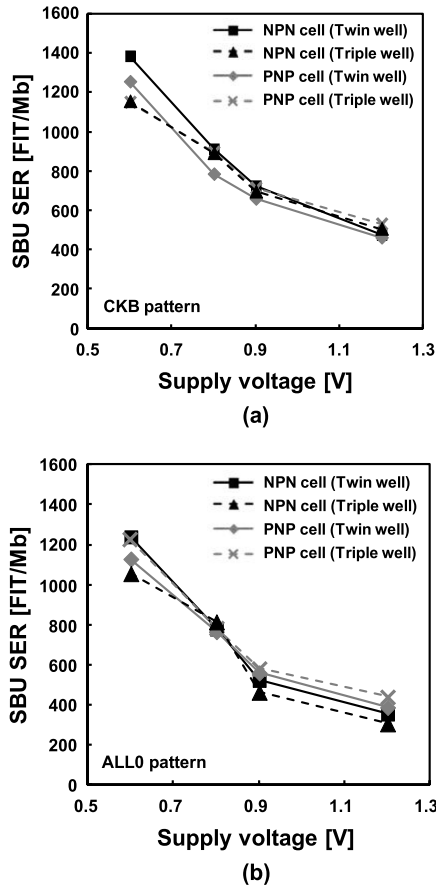


Fig. 12 Measured neutron-induced SBU SERs in the (a) CKB pattern and (b) ALL0 pattern at 0.6-1.2 V (four types).

1.2 V to assess the dependence of the SERs on the supply voltage. Results show that the SBU SERs were ranging from 500 FIT/Mb to 1400 FIT/Mb depending on the supply voltage, but no apparent difference on the SBU SER is observed among the four types. The SBU SER of the CKB pattern is slightly larger than that of the ALL0 pattern. Figures 13(a) and 13(b) show NMOS sensitive nodes in the CKB and ALL0 patterns; they are aligned in the horizontal and vertical directions, respectively. The distance between the sensitive nodes in the CKB pattern is, however, longer than that in the ALL0 pattern (see Fig. 6); this feature possibly yields a more SBU SER in the CKB pattern even if a large-energy ion hits the sensitive nodes. On the other hand, MBUs tend to be incurred in the ALL0 patterns at the same ion energy.

In addition to the SBU SER, we measured MCU SER using four data patterns presented in Fig. 13: (a) CKB, (b) ALL0, (c) column stripe (CS), and (d) row stripe (RS), in which sensitive node patterns differ.

As presented in Fig. 14, an MCU SER in the vertical direction is called $MCU_{BL=1}$ in this paper, and an MCU SER in the horizontal direction is called $MCU_{BL>1}$. The $MCU_{BL>1}$ is more important for designers to adopt the interleaving and/or ECC strategy.

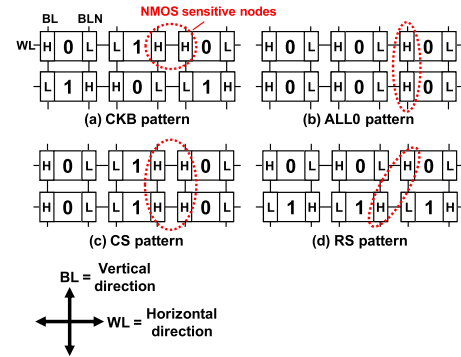


Fig. 13 Data patterns: (a) checker-board (CKB), (b) all zero (ALL0), (c) column stripe (CS), and (d) row stripe (RS).

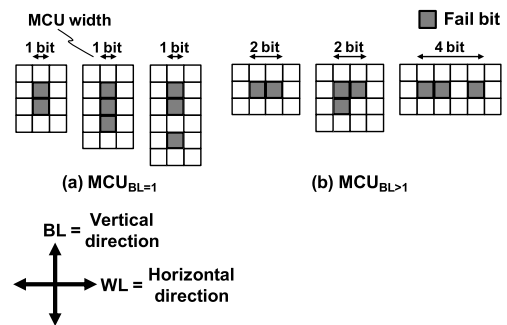


Fig. 14 Multiple-cell-upset patterns: (a) $MCU_{BL=1}$ and (b) $MCU_{BL>1}$ are defined respectively by vertical fail bits in a same column and by horizontal fail bits in two or more columns.

Figures 15(a)–(d) illustrate measured MCU SER in the four data patterns at the supply voltage of 1.2 V. When using the CKB, CS, and RS patterns, the $MCU_{BL>1}$ in the PNP 6T SRAM can be suppressed by 86–98% compared to the general NPN layout. The proposed PNP layout separates NMOSes from adjacent ones in the horizontal direction, which reduces the $MCU_{BL>1}$ SER. In the ALL0 pattern, the $MCU_{BL>1}$ even in the general NPN cells is low in nature because the sensitive nodes are not horizontally adjacent in a single bitline. As a result, only 67% improvement is observed in the MCU SER. The proposed PNP layout with the twin-well structure achieves $MCU_{BL>1}$ SERs of 5.78, 4.58, 9.48, and 4.70 FIT/Mb in the CKB, ALL0, CS and RS patterns and the PNP layout with the triple-well structure achieves $MCU_{BL>1}$ SERs of 5.78, 4.58, 18.96 and 3.13 FIT/Mb. Table 1 summarizes the data of the MCU SERs.

4. Conclusion

Reducing the horizontal $MCU_{BL>1}$ SER is more crucial than the vertical one, which can be suppressed by SEC-DEC ECC. This paper presented a proposed PNP (NMOS-centered) 6T SRAM that makes a neutron-induced $MCU_{BL>1}$ SER lower than the general NPN 6T SRAM in the horizontal direction. We designed a 65-nm 1-Mb SRAM test chips including the NPN and PNP SRAM macros. The

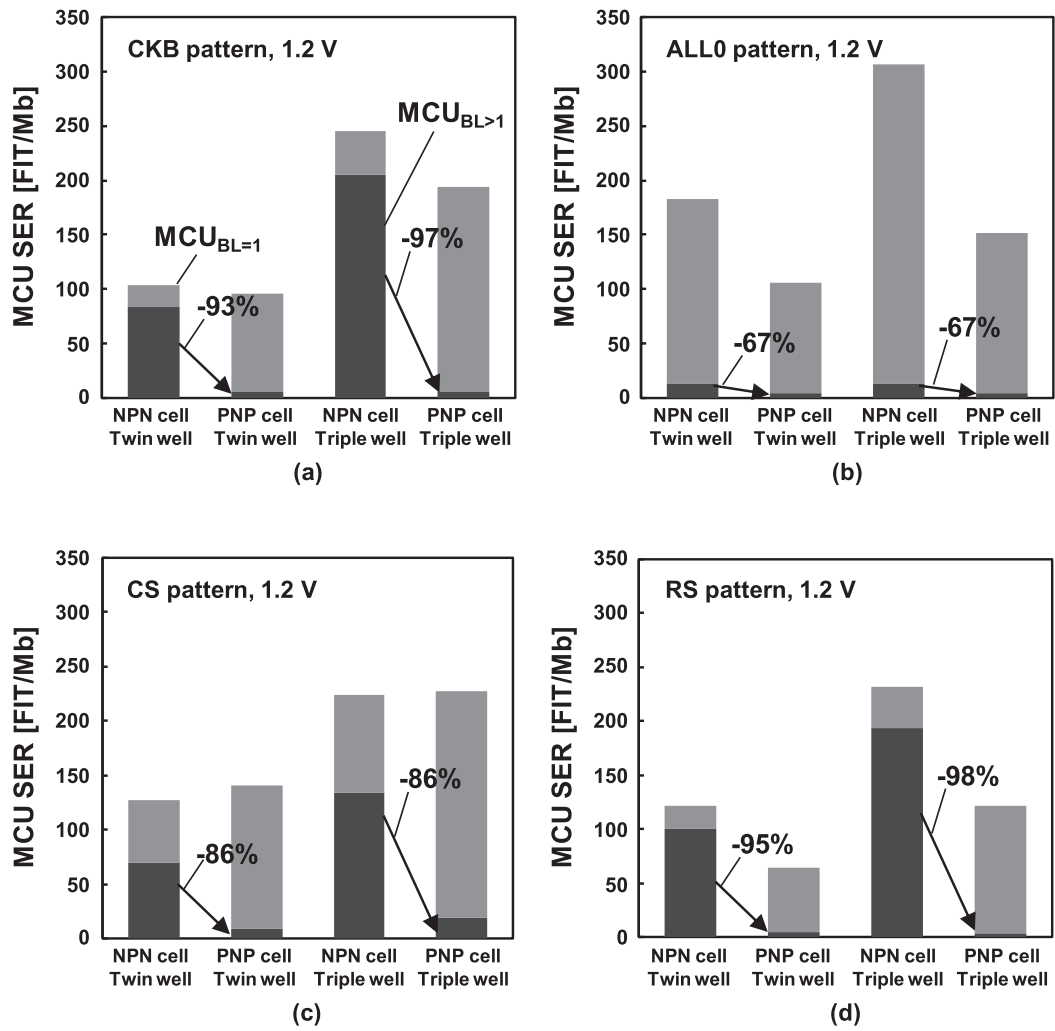


Fig. 15 Data patterns: (a) checker-board (CKB), (b) all zero (ALL0), (c) column stripe (CS), and (d) row stripe (RS).

Table 1 Summary of the neutron-induced MCU SERs.

VDD [V]	Data pattern	Well type	Cell type	MCU _{BL=1} SER [FIT/Mb]	MCU _{BL>1} SER [FIT/Mb]	Total MCU SER [FIT/Mb]
1.2	CKB	Twin	NPN	20.23	83.83	104.06
			PNP	89.61	5.78	95.39
		Triple	NPN	40.47	205.23	245.70
			PNP	187.89	5.78	193.67
	ALL0	Twin	NPN	169.51	13.74	183.25
			PNP	100.79	4.58	105.37
		Triple	NPN	293.21	13.74	306.95
			PNP	146.60	4.58	151.19
	CS	Twin	NPN	56.89	69.93	126.82
			PNP	131.56	9.48	141.04
		Triple	NPN	90.08	133.93	224.01
			PNP	208.60	18.96	227.57
	RS	Twin	NPN	21.91	100.18	122.09
			PNP	59.48	4.70	64.18
		Triple	NPN	37.57	194.10	231.66
			PNP	118.96	3.13	122.09

measurement results demonstrate that the PNP layout suppresses the horizontal $\text{MCU}_{\text{BL>1}}$ SER by 67–98% in the CKB, ALL0, CS and RS patterns with the twin-well and triple-well structure in which the tap density is 1/32 of memory cells.

Acknowledgments

This work was supported by VLSI Design and Education Center (VDEC), the University of Tokyo in collaboration with Synopsys Inc. The neutron irradiation experiment was conducted at The Research Center for Nuclear Physics (RCNP), Osaka University. We thank Mr. H. Sugimoto, Mr. Y. Asano, Mr. M. Matsumoto with Renesas Electronics Corporation, Dr. K. Belhaddad and Dr. I. Nofal with iRoC Corporation for technical discussions.

References


- [1] ITRS Report 2010, <http://www.itrs.net/>
- [2] A. Dixit and A. Wood, "The impact of new technology on soft error rates," IEEE International Reliability Physics Symposium (IRPS), pp.486–492, 2011.
- [3] H. Kobayashi, N. Kawamoto, J. Kase, and K. Shiraish, "Alpha particle and neutron-induced soft error rates and scaling trends in SRAM," IEEE International Reliability Physics Symposium (IRPS), pp.206–211, 2009.
- [4] E. Ibe, S. Chung, S. Wen, Y. Yahagi, H. Kameyama, and S. Yamamoto, "Multi-error propagation mechanisms clarified in CMOSFET SRAM devices under quasi-mono energetic neutron irradiation," IEEE Nuclear and Space Radiation Effects Conference (NSREC), no.PC-6, 2006.
- [5] N. Seifert and V. Zia, "Assessing the impact of scaling on the efficacy of spatial redundancy based mitigation schemes for terrestrial applications," IEEE Silicon Errors in Logic—System Effects (SELSE), 2007.
- [6] J. Maiz, S. Hareland, K. Zhang, and P. Armstrong, "Characterization of multi-bit soft error events in advanced SRAMs," IEEE International Electron Devices Meeting (IEDM), pp.519–522, 2003.
- [7] E. Ibe, S. Chung, S. Wen, H. Yamaguchi, Y. Yahagi, H. Kameyama, S. Yamamoto, and T. Akioka, "Spreading diversity in multi-cell neutron-induced upsets with device scaling," IEEE Custom Integrated Circuits Conference (CICC), pp.437–444, 2006.
- [8] E. Ibe, K. Shimbo, H. Taniguchi, and T. Toba, "Quantification and mitigation strategies of neutron induced soft-errors in CMOS devices and components," IEEE International Reliability Physics Symposium (IRPS), pp.239–246, 2011.
- [9] S. Ohbayashi, M. Yabuuchi, K. Nii, Y. Tsukamoto, S. Imaoka, Y. Oda, T. Yoshihara, M. Igarashi, M. Takeuchi, H. Kawashima, Y. Yamaguchi, K. Tsukamoto, M. Inuishi, H. Makino, K. Ishibashi, and H. Shinohara, "A 65-nm SoC embedded 6T-SRAM designed for manufacturability with read and write operation stabilizing circuits," IEEE Symposium on VLSI Circuits Digest of Technical Papers, pp.820–829, 2007.
- [10] S. Yoshimoto, T. Amashita, D. Kozuwa, T. Takata, M. Yoshimura, Y. Matsunaga, H. Yasuura, H. Kawaguchi, and M. Yoshimoto, "Multiple-bit-upset and single-bit-upset resilient 8T SRAM bitcell layout with divided wordline structure," IEEE International On-Line Testing Symposium (IOLTS), pp.151–156, 2011.
- [11] iRoC TFIT simulator, transistor level soft error analysis, <http://www.iroctech.com>
- [12] G. Gasiot, D. Giot, and P. Roche, "Multiple cell upsets as the key contribution to the total SER of 65 nm CMOS SRAMs and its dependence on well engineering," IEEE Trans. Nucl. Sci., vol.54, no.6, pp.2468–2473, 2007.
- [13] K. Osada, K. Yamaguchi, Y. Saitoh, and T. Kawahara, "Cosmic-ray multi-error immunity for SRAM, based on analysis of the parasitic bipolar effect," IEEE Symposium on VLSI Circuits Digest of Technical Papers, pp.255–258, 2003.
- [14] JEDEC, "Measurement and reporting of alpha particles and terrestrial cosmic ray-induced soft errors in semiconductor devices: JESD89A," JEDEC STANDARD, JEDEC Solid State Technology Association, no.89, pp.1–85, 2006.
- [15] P. Hazucha and C. Svensson, "Impact of CMOS technology scaling on the atmospheric neutron soft error rate," IEEE Trans. Nucl. Sci., vol.47, no.6, pp.2586–2594, 2000.
- [16] P. Shivakumar, M. Kistler, S.W. Keckler, D. Burger, and L. Alvisi, "Modeling the effect of technology trends on the soft error rate of combinational logic," IEEE Dependable Systems and Networks (DSN), pp.389–398, 2002.
- [17] C. Robert, "Radiation-induced soft errors in advanced semiconductor technologies," IEEE Trans. Nucl. Sci., vol.5, no.3, pp.305–316, 2005.
- [18] S. Yoshimoto, T. Amashita, S. Okumura, K. Nii, H. Kawaguchi, and M. Yoshimoto, "NMOS-centered 6T SRAM layout reducing neutron-induced multiple Cell upsets," IEEE International Reliability Physics Symposium (IRPS), pp.5B.5.1–5, April 2012.



Shusuke Yoshimoto received B.E. and M.E. degrees in Computer and Systems Engineering from Kobe University, Hyogo, Japan, in 2009 and 2011, respectively. He is currently working in the doctoral course at that university. His current research is low-power and soft-error tolerant SRAM designs. He was a recipient of IEEE SSCS 2011 and 2012 Japan Chapter Academic Research Awards. He is a student member of IPSJ and IEEE.



Shunsuke Okumura received his B.E. and M.E. degrees in Computer and Systems Engineering in 2008 and 2010, respectively from Kobe University, Hyogo, Japan, where he is currently working in the doctoral course. His current research is high-performance, low-power SRAM designs, dependable SRAM designs, and error correcting codes implementation. He is a student member of IPSJ and IEEE.



Koji Nii received the B.E. and M.E. degrees in electrical engineering from Tokushima University, Tokushima, Japan, in 1988 and 1990, respectively, and the Ph.D. degree in informatics and electronics engineering from Kobe University, Hyogo, Japan, in 2008. In 1990, he joined the ASIC Design Engineering Center, Mitsubishi Electric Corporation, Itami, Japan, where he has been working on designing embedded SRAMs for CMOS ASICs. In 2003, he was transferred to Renesas Technology Corpo-

ration, Itami, Japan, which is a joint company of Mitsubishi Electric Corp. and Hitachi Ltd. in the semiconductor field. He transferred his work location to Kodaira, Tokyo from Itami, Hyogo on April 2009, and his current responsibility is Section Manager. He holds over 70 issued US Patents. He currently works on the research and development of deep-submicron embedded SRAM in the Embedded SRAM Development Department of Renesas Electronics Corporation, Kodaira, Tokyo, Japan. Dr. Nii received the Best Paper Awards at IEEE International Conference on Microelectronic Test Structures (ICMTS) in 2007. He is a Technical Program Committee of the IEEE CICC. He is a member of the IEEE Solid-State Circuits Society and the IEEE Electron Devices Society.



Hiroshi Kawaguchi received his B.E. and M.E. degrees in Electronic Engineering from Chiba University, Chiba, Japan, in 1991 and 1993, respectively, and earned a Ph.D. degree in Engineering from The University of Tokyo, Tokyo, Japan, in 2006. He joined Konami Corporation, Kobe, Japan, in 1993, where he developed arcade entertainment systems. He moved to the Institute of Industrial Science, The University of Tokyo, as a Technical Associate in 1996, and was appointed as a Research Asso-

ciate in 2003. In 2005, he moved to Kobe University, Kobe, Japan. Since 2007, he has been an Associate Professor with the Department of Information Science at that university. He is also a Collaborative Researcher with the Institute of Industrial Science, The University of Tokyo. His current research interests include low-voltage SRAM, RF circuits, and ubiquitous sensor networks. Dr. Kawaguchi was a recipient of the IEEE ISSCC 2004 Takuo Sugano Outstanding Paper Award and the IEEE Kansai Section 2006 Gold Award. He has served as a Design and Implementation of Signal Processing Systems (DISPS) Technical Committee Member for IEEE Signal Processing Society, as a Program Committee Member for IEEE Custom Integrated Circuits Conference (CICC) and IEEE Symposium on Low-Power and High-Speed Chips (COOL Chips), and as a Guest Associate Editor of IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences and IPSJ Transactions on System LSI Design Methodology (TSLDM). He is a member of IEEE, ACM, and IPSJ.



Masahiko Yoshimoto earned his B.S. degree in Electronic Engineering from Nagoya Institute of Technology, Nagoya, Japan, in 1975, and an M.S. degree in Electronic Engineering from Nagoya University, Nagoya, Japan, in 1977. He earned a Ph.D. degree in Electrical Engineering from Nagoya University, Nagoya, Japan in 1998. He joined the LSI Laboratory, Mitsubishi Electric Corporation, Itami, Japan, in April 1977. During 1978–1983 he was engaged in the design of NMOS and CMOS static RAM

including a 64K full CMOS RAM with the world's first divided-wordline structure. From 1984, he was involved in research and development of multimedia ULSI systems for digital broadcasting and digital communication systems based on MPEG2 and MPEG4 Codec LSI core technology. Since 2000, he has been a Professor of the Department of Electrical and Electronic Systems Engineering at Kanazawa University, Japan. Since 2004, he has been a Professor of the Department of Computer and Systems Engineering at Kobe University, Japan. His current activities are research and development of multimedia and ubiquitous media VLSI systems including an ultra-low-power image compression processor and a low-power wireless interface circuit. He holds 70 registered patents. He served on the Program Committee of the IEEE International Solid State Circuit Conference during 1991–1993. Additionally, he served as a Guest Editor for special issues on Low-Power System LSI, IP, and Related Technologies of IEICE Transactions in 2004. He received R&D100 awards in 1990 and 1996 from R&D Magazine for development of the DISP and development of a real-time MPEG2 video encoder chipset, respectively.